

2021 to Current Polaris 850 Assault/SKS/RMK Complete Clutch kit 0-3000ft Boondocking Kit (123-159) For Straightline Performance Single Pipe Only

Parts included in Clutch Kit:

Operating RPM:

Operating RPM - 7850-8050 Straightline Pipe


1-Primary Spring 123-101 (silver) 3-Primary Clutch Weights 125-137 (64-80g) 1-Secondary Spring 125-129 (black/white) 1-TSS-04 Helix 125-131 1-125-135 Weight Adjustment Kit 6- 125-133 Extra Tungsten Washers 1 – 460079K

Settings:

Helix Setting - Side B

Clutch weight starting point: Base Hole – 6.5g Total 2-Tungsten washers 1 – Small Washer 1 – Long Bolt Center Hole – 6.1g Total 2 – Tungsten Washers 1 – Long Bolt Tip Hole – 2.4g Total Weight 2 – Steel Washers 1 – Short Bolt

See Clutch Weight Box for overview on weights/washers/bolts and tungsten,

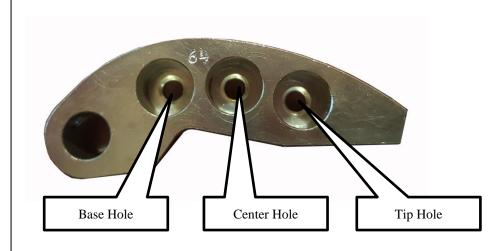

Remove the primary clutch and install the weights and primary spring. Remove secondary clutch **and install new helix in proper setting**, with spring. Inspect all internal clutch components for wear. **If excesses wear is prevalent replace needed items.**

Check out Straightline @ www.straightlineperformance.com

Tech questions can be handled via e-mail at tech@straightlineperformance.com

