


**INSTALLATION INSTRUCTIONS**  
**Polaris RZR 1" to 3" Adjustable Lift Kit**

| Item | Description    | Qty |
|------|----------------|-----|
| A    | Sway Bar Links | 2   |
| B    | Front Bracket  | 1   |
| C    | Rear Brackets  | 2   |

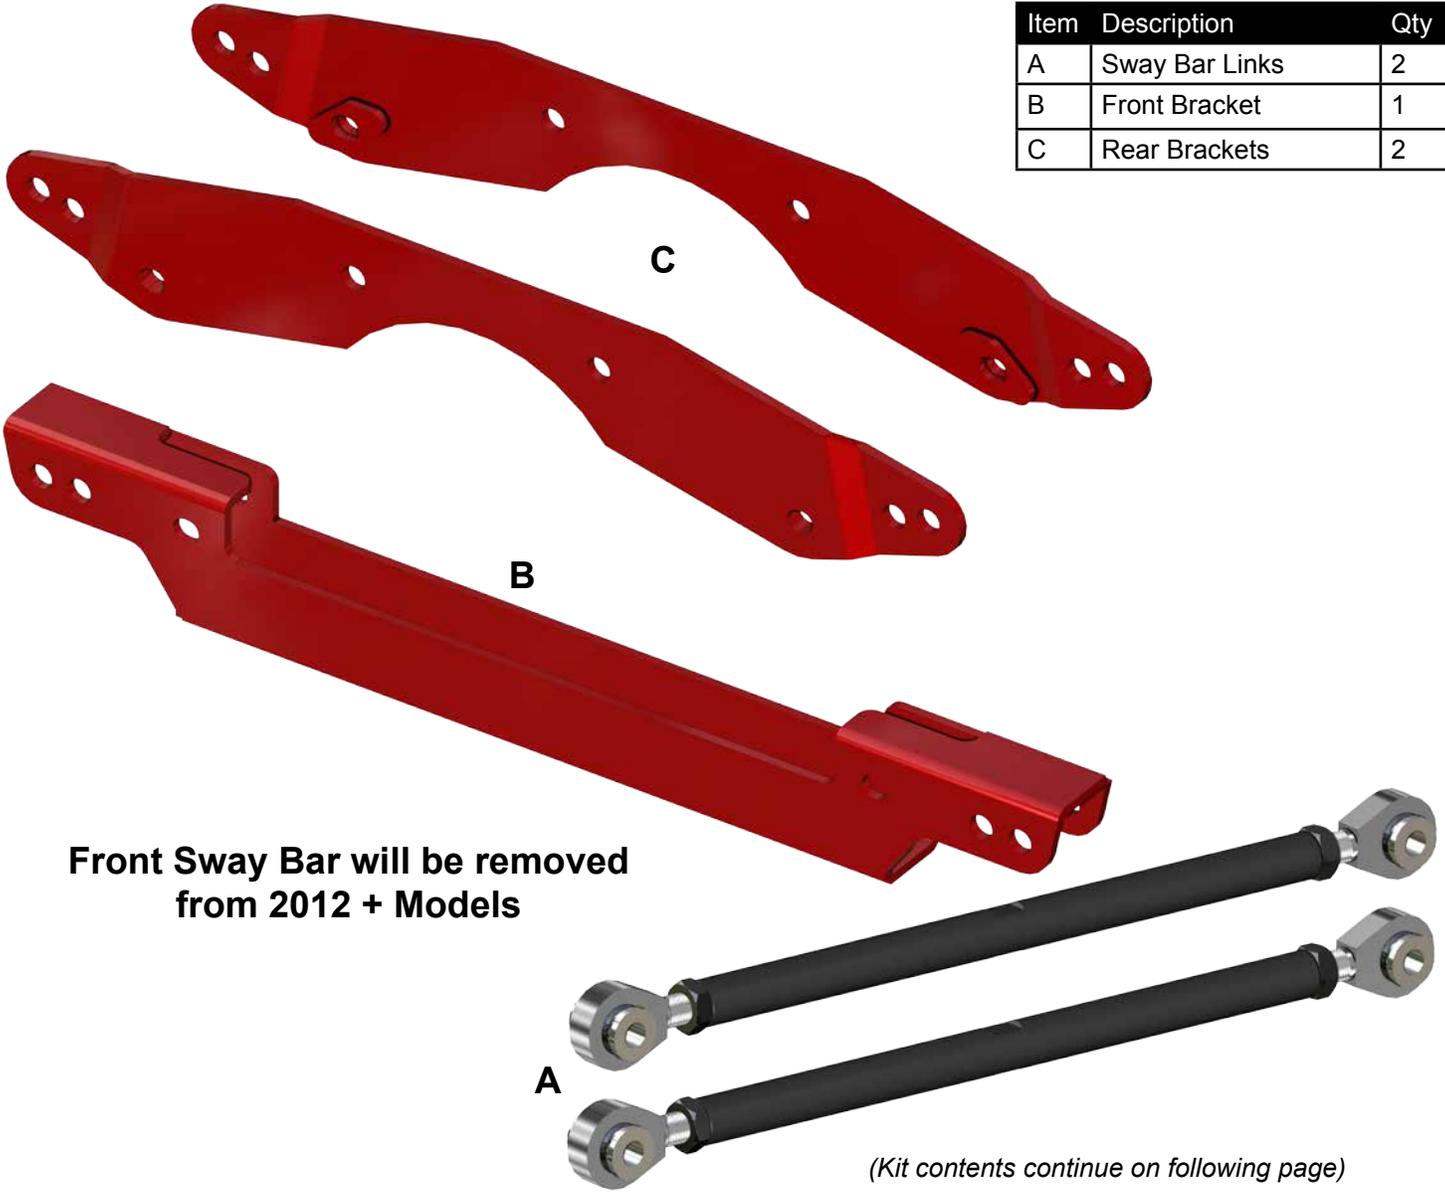

**Front Sway Bar will be removed  
 from 2012 + Models**

*(Kit contents continue on following page)*

**Read instructions and view illustrations before beginning.**

**Need help with your installation?**

✉ sales@superatv.com    🖥 www.superatv.com

☎ 1-812-574-7777    🕒 8:00am - 9:00pm EST M-Th  
 8:00am - 7:00pm EST Friday  
 9:00am - 2:00pm EST Saturday

*Thank You  
 For Choosing*



**Liability Statement**





SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.


SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warranted if item was not installed properly, misused, or modified.

*Kit contents continued*

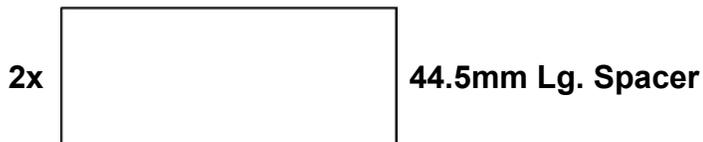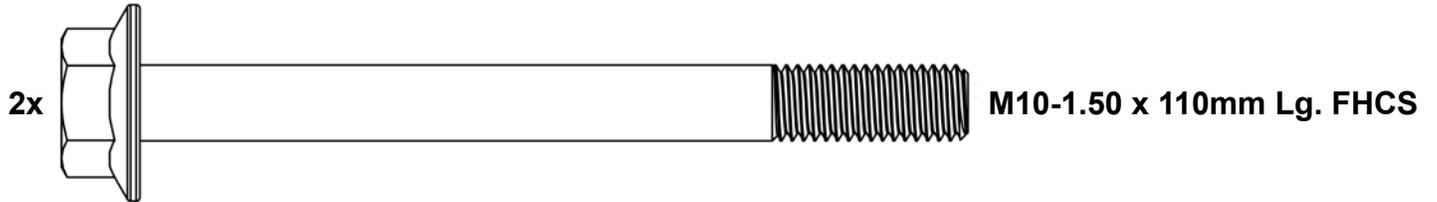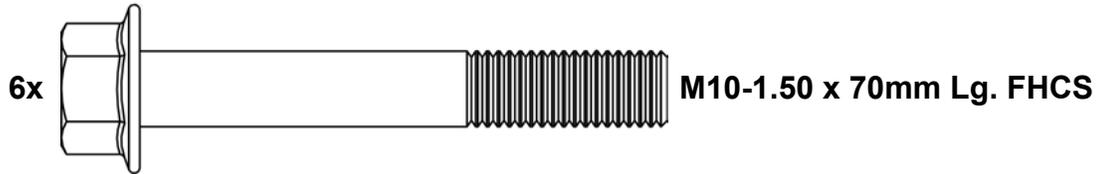
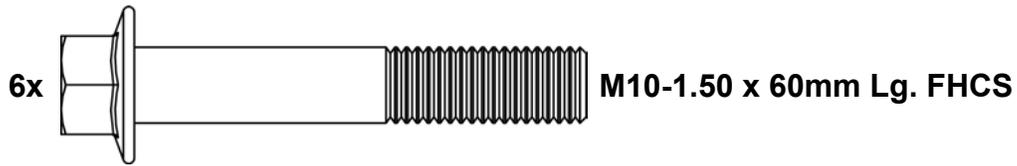


**Front:** Do not tighten hardware completely unless noted.

- Remove Wheels, Shocks, and Sway Bar Links.
- Install Front Bracket (B) to Shock Mount with Spacers and hardware shown.
- Determine desired lift and reinstall Shocks to Front Brackets (B) with hardware shown.



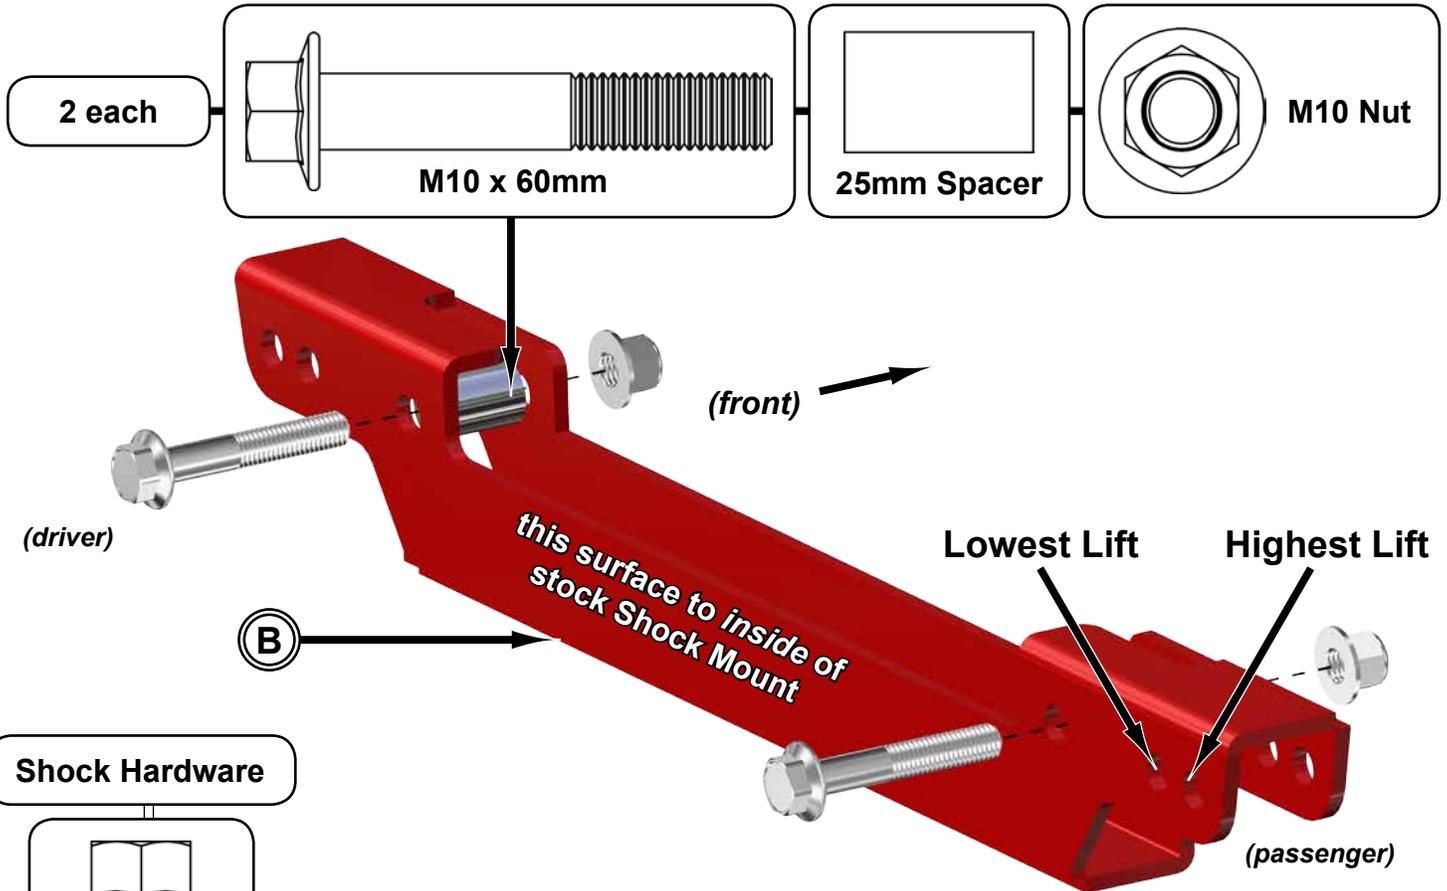


**Shock Hardware**

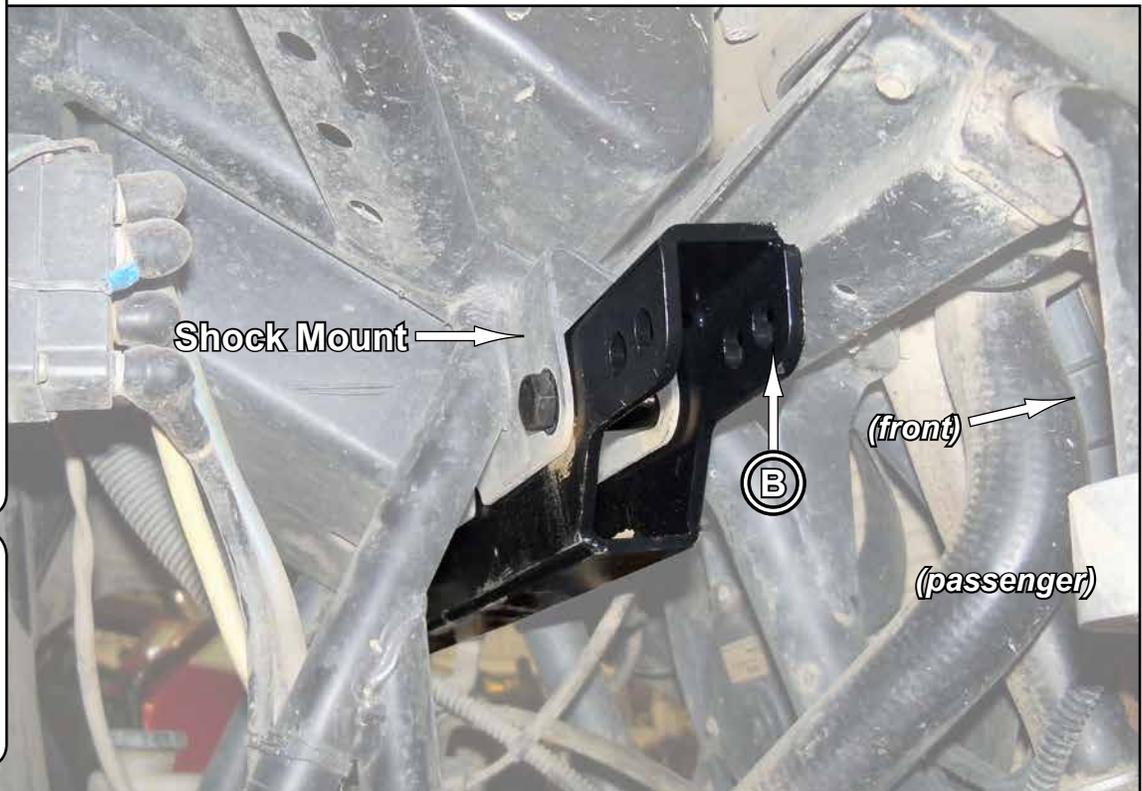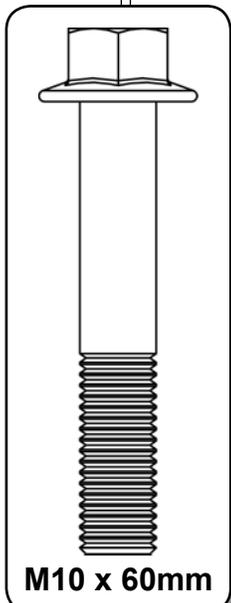

**Front continued:** *Do not tighten hardware completely unless noted.*


- Install Sway Bar Link (A) to Sway Bar with hardware shown.
- Install Shock to A-Arm with hardware shown; **DO NOT INSTALL NUT.**
- Install Sway Bar Link onto previously installed bolt.
- Secure components with Spacer and hardware shown.

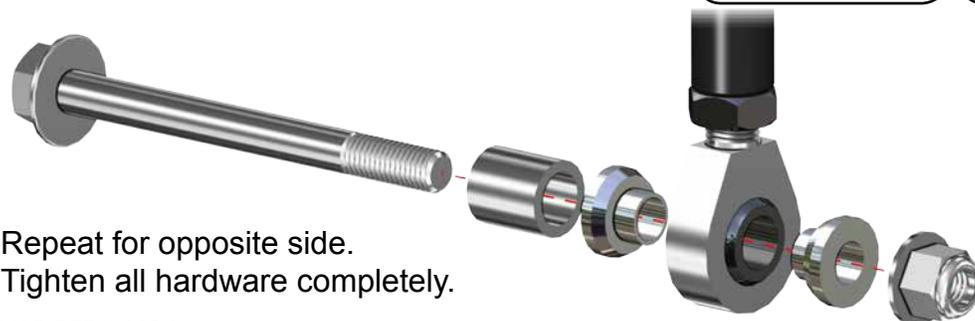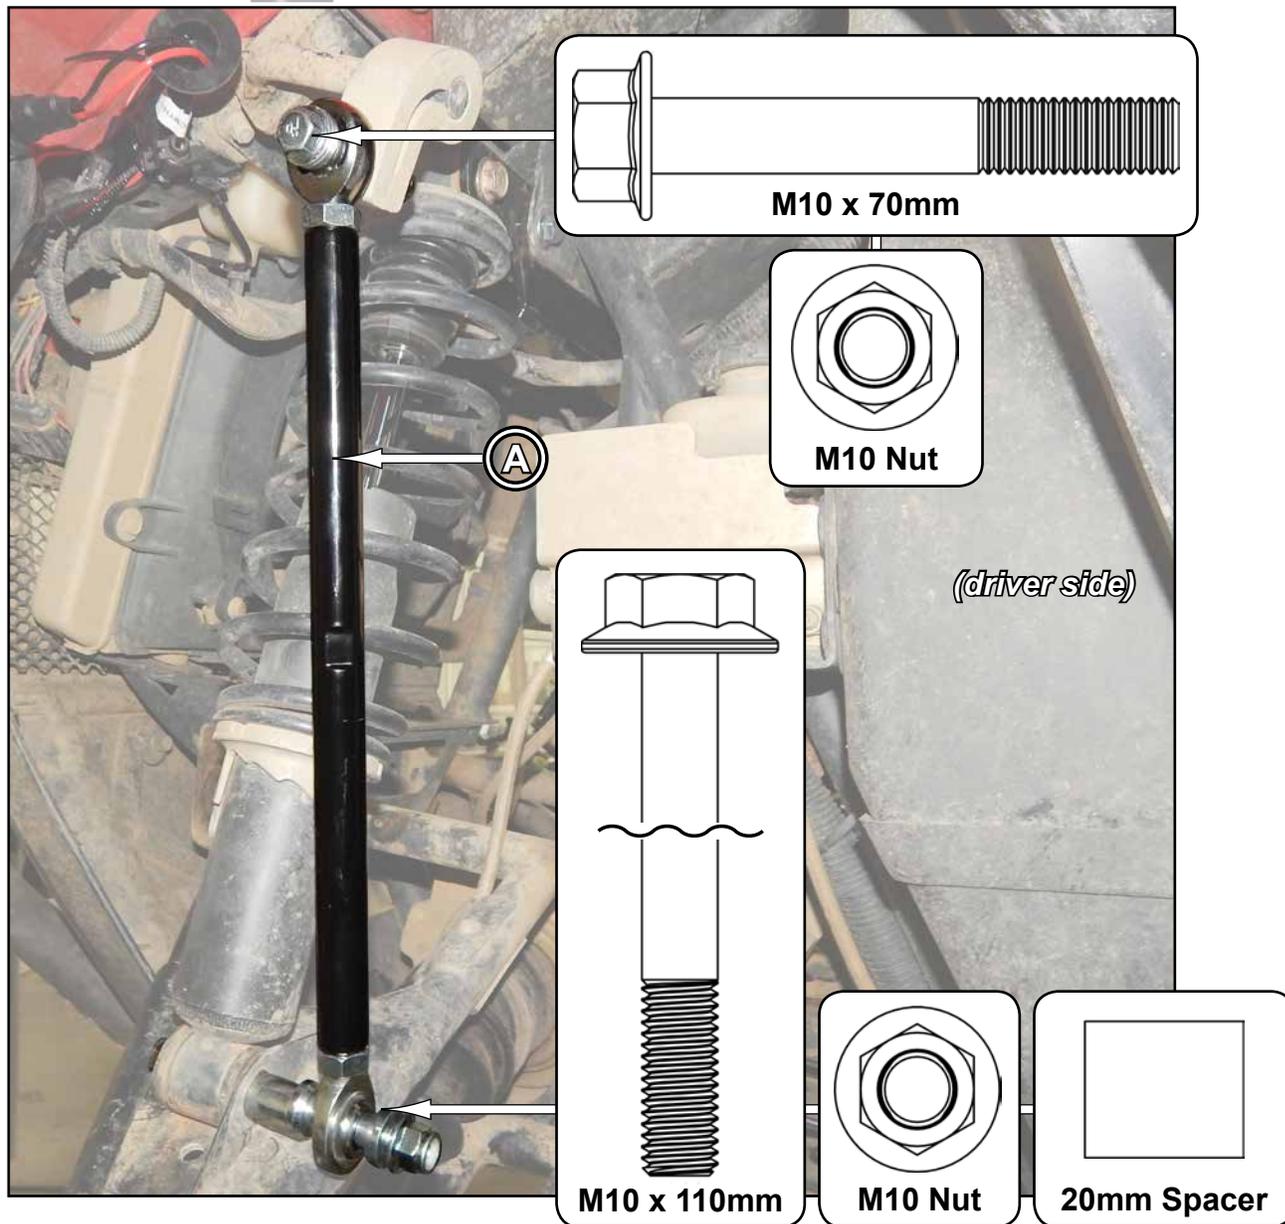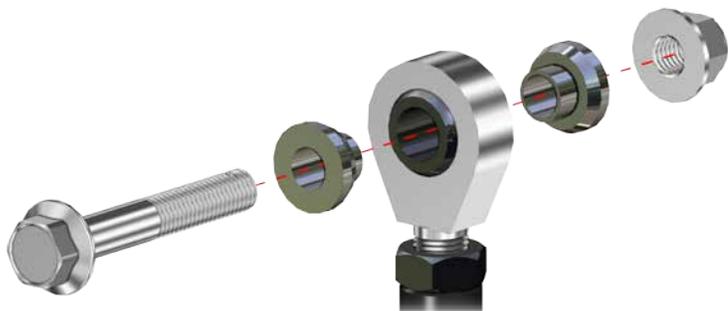


- Repeat for opposite side.
- Tighten all hardware completely.

**Rear:** Do not tighten hardware completely unless noted.


- Remove Wheels and unbolt Shocks from Frame.
- Install Rear Brackets (C) to Frame.
- Install Spacers shown between Rear Brackets (C).
- Secure with hardware shown.

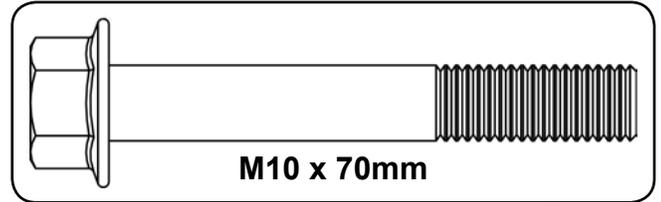

4 each



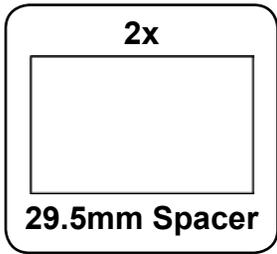


Welded Plates, on Rear Brackets,  
face inward

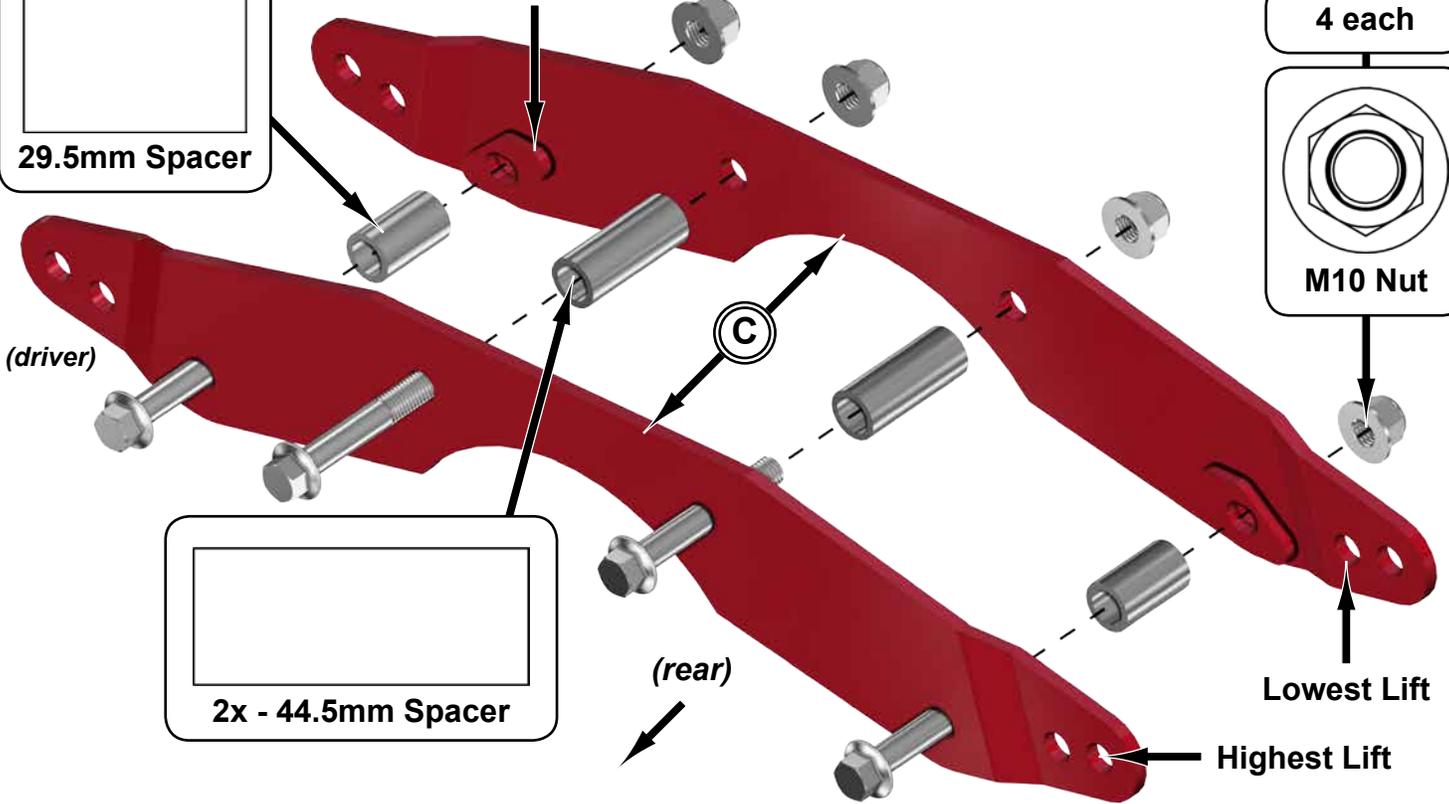

- Determine desired lift and reinstall Shocks to Rear Brackets (C) with hardware shown.
- *Note: If using highest lift setting, adjust Rear Shocks completely out.*
- Tighten all hardware completely.

Shock Hardware

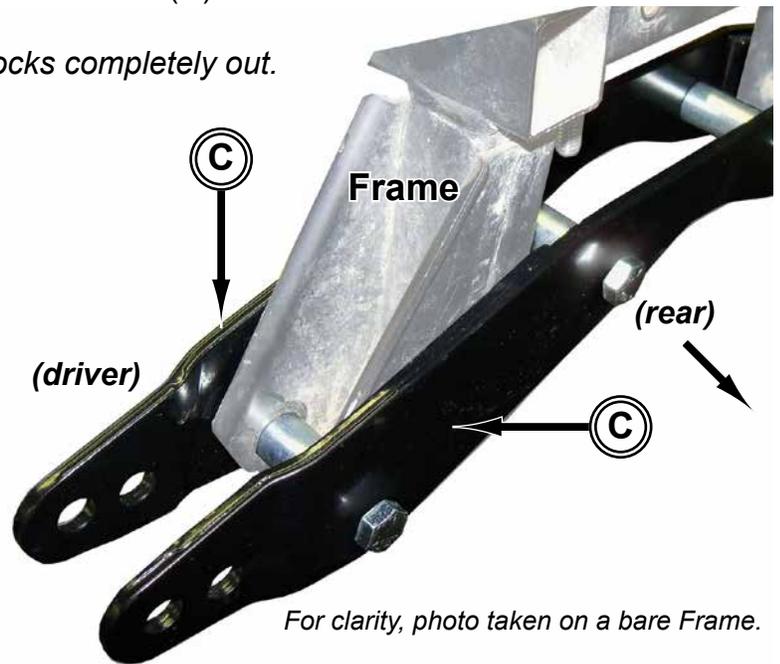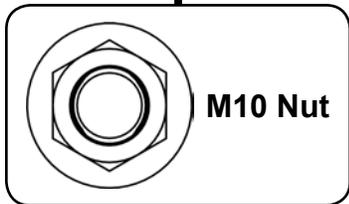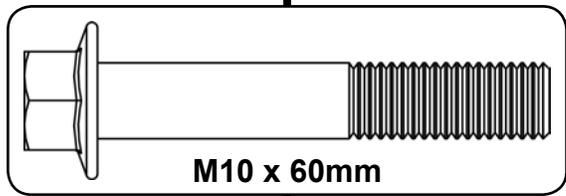

For clarity, photo taken on a bare Frame.

**Rear Sway Bar Alternative (OPTIONAL)**

Flipping Sway Bar upside down will reduce angle and shorten distance to A-Arms.

- Remove Sway Bar from driver side.
- Flip Sway Bar upside down and reinstall.